


# 13,500-pound steerable lift axle, alternate proposal

## REGIONAL REFUSE DISPOSAL DISTRICT #1

### REQUEST FOR PROPOSALS (RFP) NEW ROLL-OFF TRUCK



31 New Hartford Road • Barkhamsted, Connecticut

|                                    |                                                                                                          |
|------------------------------------|----------------------------------------------------------------------------------------------------------|
| <b>RFP Issue Date</b>              | Monday, October 12, 2026                                                                                 |
| <b>Proposal Due Date and Time</b>  | Friday, October 23, 2026, at 2:00 p.m.                                                                   |
| <b>Submission Method / Address</b> | Deliver proposals to: Regional Refuse Disposal District #1, 31 New Hartford Road, Barkhamsted, CT 06063. |
| <b>Questions Due</b>               | Questions must be directed to administration@rrdd1.com.                                                  |

### 1. Invitation and Purpose

Regional Refuse Disposal District #1 ("RRDD1" or "District"), located at 31 New Hartford Road in Barkhamsted, Connecticut, invites qualified truck dealers and manufacturers to submit proposals for the sale and delivery of one new roll-off truck. RRDD1 uses its trucks to transport recyclables, municipal solid waste, and bulky waste, generally within a 50-mile radius of Barkhamsted, Connecticut.

Proposals shall identify the truck and equipment offered, demonstrate compliance with the specifications below, and provide complete pricing and warranty information. The District may work with the selected vendor to finalize compatible details, provided the required specifications—including the 24-foot hoist—are met.

### 2. Required Truck Specifications

The proposed truck shall meet or exceed the following minimum requirements unless a specification expressly allows an alternate:

- **General configuration:** New roll-off truck capable of hauling containers up to 50 cubic yards. **Overall length shall not exceed 37.5 feet, measured from the front bumper to the end of the hoist.** A 2026 model-year truck is preferred. This will be a 2028 Model year Freightliner 114SD Plus. Lead time depends on ordering date. February, March or April of 2027
- **Engine:** Six-cylinder diesel engine rated at a minimum of 525 horsepower, equipped with an engine brake. Meets requirements
- **Engine block heater:** Minimum 1,500-watt block heater. Meets Requirements spec# 138-005
- **Front axle:** 20,000-pound capacity. spec# 400-1AC confirm this is 20K Front axle
- **Lift axle:** Factory-installed, steerable 20,000-pound lift axle located ahead of the rear axles. Vendors may also submit a separately priced alternate with a 13,500-pound steerable lift axle; the proposal must clearly identify it as an alternate. Meets requirements. Spec# 035-128 for 13500 steerable lift axle
- **Rear axle / suspension:** 46,000-pound axle capacity. Vendor shall identify the proposed rear suspension and axle configuration. meets requirements. Spec# 420-103
- **Front tires and wheels:** 315/22.50 front tires with unpolished aluminum rims. meets requirements. spec# 093-1XJ
- **Rear and tag-axle tires and wheels:** 11/22.50 rear and tag-axle tires with unpolished aluminum rims. meets requirements. spec# 342-1M3
- **Transmission:** Allison automatic transmission. meets requirements. Spec# 342-1M3
- **Hoist — mandatory:** A minimum 60,000-pound-capacity, 24-foot hoist suitable for handling 50-cubic-yard roll-off containers. The proposal must expressly confirm the hoist is 24 feet long and provide the manufacturer, model, rated capacity, and relevant dimensional information. A proposal without a 24-

foot hoist will be considered nonresponsive unless RRDD1 expressly amends this requirement in writing.

meets requirements. OR60194S072F is model number. 194 series is Galfab's 24ft hoist spec

- **Container handling: Automatic box grabbers at the rear.** Meets requirements. Automatic box grabbers/hookers will be installed
- **Tarp system: Tarp system suitable for use with 50-cubic-yard containers.** Meets Requirements.RP4500 Pioneer electric tarp
- **Fuel tank: Minimum 75-gallon fuel tank, left-mounted.** 90 gallon fuel tank LH mounted
- **Driver seat: High-back, air-suspension seat.** meets requirements. Spec# 756-338
- **Instrumentation: Full gauge panel.** meets requirements. Spec# 844-001

### 3. Proposal Contents

1. Manufacturer, model, and complete description of the truck chassis and included equipment. A 2026 model-year truck is preferred; vendors must clearly identify the model year offered.
2. A specification sheet identifying compliance with every item in Section 2. Any deviation must be clearly disclosed; do not assume an unlisted substitution will be accepted.
3. Separate identification of the 24-foot hoist, including manufacturer, model, rated capacity, and confirmation of suitability for 50-cubic-yard containers.
4. Itemized purchase price, including chassis, hoist, tarp system, box grabbers, delivery, setup, and any other charges. Identify all taxes, fees, and optional equipment separately.
5. Delivery lead time from order/contract execution and the location from which the truck will be delivered.
6. Standard manufacturer and dealer warranties, available extended warranty options, duration and coverage of each, exclusions, and the price of each optional warranty.
7. Information on authorized service locations, parts availability, and the process for warranty service.
8. Proposal validity period and any assumptions or conditions affecting the quoted price.
9. Name and contact information of the vendor representative authorized to answer questions and negotiate final specifications.

### 4. Pricing

Provide a firm total price for the truck as proposed, with an itemized breakdown. Quote any permitted alternate configuration separately and do not combine alternate pricing with the base proposal. Clearly identify optional equipment and warranty pricing. Vendors may also submit an optional financing proposal that identifies the proposed financing terms, down payment (if any), interest rate, term, payment frequency, total cost of financing, and any fees or other conditions. Purchase and financing proposals must be shown separately. The District may request clarification of pricing but will not be responsible for costs omitted from the proposal.

### 5. Submission Requirements

Proposals must be received by Friday, October 23, 2026, at 2:00 p.m. at the following address: Regional Refuse Disposal District #1, 31 New Hartford Road, Barkhamsted, CT 06063. Proposals received after the deadline will not be considered.

### 6. Contact

Questions regarding this RFP should be directed to [administration@rrdd1.com](mailto:administration@rrdd1.com). The District will respond to all inquiries in a timely manner and may also issue addenda to the RFP as necessary.

Regional Refuse Disposal District #1

Todd Arcelaschi, Administrator

31 New Hartford Road, Barkhamsted, CT 06063

## 7. Review and Award

RRDD1 intends to evaluate proposals for responsiveness to the specifications, including the mandatory 24-foot hoist, total price, equipment suitability, delivery schedule, warranty coverage, service support, and overall value to the District. The District may seek clarification, verify information, negotiate final details with a vendor, reject any or all proposals, waive informalities where permitted, or cancel this solicitation if doing so is in the District's best interest. Issuance of this RFP does not obligate RRDD1 to purchase a truck or reimburse proposal costs.


Any award is subject to applicable District approval requirements and completion of a written purchase agreement or purchase order. No vendor should begin work or incur costs on the District's behalf before receiving written authorization.

## 8. Final Specifications and Delivery

The specifications in this RFP are intended to describe the District's requirements. The successful vendor may work with RRDD1 to confirm final compatible details before order placement. No change may reduce or eliminate a mandatory requirement, including the minimum 24-foot hoist, without written approval by the District through an authorized amendment or written agreement. The vendor shall provide documentation showing the final truck and equipment configuration before delivery.

## 9. Vendor Acknowledgment

By submitting a proposal, the vendor acknowledges that it has reviewed this RFP and has disclosed all exceptions to the requested specifications.

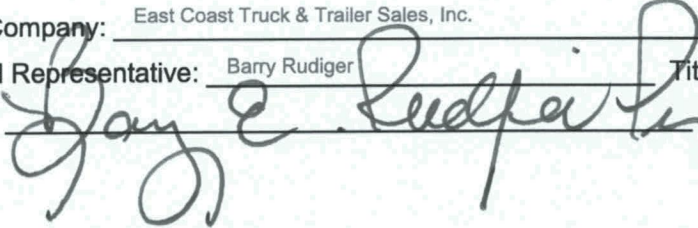Vendor / Company: East Coast Truck & Trailer Sales, Inc.  
Authorized Representative: Barry Rudiger Title: President  
Signature:  Date: 10/21/26

# PROPOSAL TEMPLATE-13,500 Pound Steerable Lift Axle Alternative Proposal.

## Firm Base Total Delivered Price: \$241,500

REGIONAL REFUSE DISPOSAL DISTRICT #1 | NEW ROLL-OFF TRUCK

Submitted by: East Coast Truck & Trailer Sales, Inc. (ECTTS)

Proposal due: October 23, 2026, 2:00 p.m. | Delivery: 31 New Hartford Road, Barkhamsted, CT 06063

### 1. Truck chassis and equipment description

Manufacturer: Freightliner

Model / trim: 114 SD Plus

Model year: 2028

Engine / horsepower / engine brake: Detroit DD13 Gen 6 12.8L/525 HP/Engine Brake Compliant

Transmission: Allison 4500 RDS Automatic Transmission

Front / rear / pusher axle and suspension: 20K Taperleaf front suspension/Hendrickson 46K rear suspension/13,500K steerable lift axle

Wheelbase / CA / AF: 263 in WB / ~197.24 in calculated CA / 75 in rear frame overhang.

Fuel tank and mounting location 90-gallon aluminum fuel tank, LH mounted (Freightliner code 204-155).

Included standard and optional equipment Detroit DD13 Gen 6 525 hp; Jacobs compression brake; 1,500 W block heater; Allison 4500 RDS with PTO provision; 20K front axle; 46K tandem rear axles/Hendrickson HAULMAAX EX; Hendrickson EX13 13,500K steerable pusher; 90-gal LH tank; Isringhausen high-back air driver seat; ALCOA aluminum wheels. Hoist: Galfab OR60, Pioneer RD4500 tarp and Hooker securement as quoted.

### 2. Section 2 specification compliance matrix

Status: Meets / Does Not Meet / Pending Verification. List exact offered specifications and any deviations. Attach supporting spec pages.

| RFP requirement                                       | Status | Offered specification / comments                                                            |
|-------------------------------------------------------|--------|---------------------------------------------------------------------------------------------|
| New roll-off; containers up to 50 yd                  | Meets  | New 2028 Freightliner 114SD Plus roll-off chassis; Galfab OR60 20–24 ft container range.    |
| Overall length less than 37.5 ft, bumper to hoist end | Meets  | 263 in WB / 75 in rear frame overhang;                                                      |
| 2026 model year preferred                             | Meets  | 2028 model year offered; 2026, not mandatory.                                               |
| Six-cylinder diesel 525 hp and engine brake           | Meets  | Detroit DD13 Gen 6 six-cylinder 525 hp; Jacobs compression engine brake (101-3GD; 128-002). |
| Engine block heater 1,500 W                           | Meets  | Phillips-Temro 1,500 W block heater (138-005).                                              |

|                                                                     |       |                                                                                                                                                    |
|---------------------------------------------------------------------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| Front axle 20,000 lb                                                | Meets | Meritor MFS-20-133A 20,000 lb front axle (400-1AC).                                                                                                |
| Factory-installed steerable 13,500-lb lift axle ahead of rear axles | Meets | Hendrickson EX13 13,500 lb steerable pusher (035-128/443-126);                                                                                     |
| Rear axle capacity 46,000 lb; identify suspension and configuration | Meets | Meritor RT-46-160 46,000 lb tandem (420-103), Hendrickson HAULMAAX EX 46,000 lb suspension (622-312).                                              |
| 315/22.50 front tires; unpolished aluminum rims                     | Meets | Bridgestone 315/80R22.5 fronts (093-1XJ), ALCOA aluminum wheels (502-664);                                                                         |
| 11/22.50 rear and tag tires; unpolished aluminum rims               | Meets | Bridgestone 11R22.5 rear/pusher (094-1RW/095-14G); ALCOA aluminum wheels (505-1HB/509-1HB);                                                        |
| Allison automatic transmission                                      | Meets | Allison 4500 RDS automatic with PTO provision (342-1M3).                                                                                           |
| Mandatory 24-ft hoist, ≥60,000 lb; 50-yd suitable                   | Meets | Galfab OR60 OR60194S072F, 60,000 lb, catalog 24 ft 11 in overall length; 20–24 ft container range; 50 yd cubic yard                                |
| Automatic rear box grabbers                                         | Meets | Quoted Hooker system with push-pull valve and nylon ratchets;                                                                                      |
| Tarp suitable for 50-yd containers                                  | Meets | Pioneer RD4500 electric tarp quoted;                                                                                                               |
| Left-mounted fuel tank 75 gallons                                   | Meets | 90-gal LH aluminum fuel tank (204-155).                                                                                                            |
| High-back air-suspension driver seat                                | Meets | Isringhausen high-back air-suspension driver seat (756-338).                                                                                       |
| Full gauge panel                                                    | Meets | Full instrumentation including air, fuel, coolant, oil pressure and transmission temperature gauges (840-001, 844-001, 856-001, 852-002, 864-001). |

### 3. Mandatory 24-foot hoist identification

Hoist manufacturer and exact model: Galfab OR60, quoted configuration OR60194S072F

Rated lifting capacity (lb): 60,000 lb.

Hoist length (ft/in): 24 ft 11 in overall physical hoist length per Galfab OR Series catalog

### 4. Firm itemized purchase pricing

| Base proposal component   | Price (USD)       |
|---------------------------|-------------------|
| Truck chassis             | \$ 161,000        |
| 24-foot hoist             | \$ 40000          |
| Tarp system               | \$ 6000           |
| Automatic box grabbers    | \$ 4500           |
| Body installation / setup | \$ 30000          |
| Delivery / transportation | \$ N/A            |
| Other charges (specify)   | \$ N/A            |
| Taxes (specify)           | \$ N/A            |
| Fees (specify)            | \$ N/A            |
| <b>FIRM BASE TOTAL</b>    | <b>\$ 241,500</b> |

Optional equipment (not included in base total): N/A

Permitted 13,500-lb steerable lift-axle alternate (separate from base): Secondary/Alternative Quote

Optional financing, if offered (separate from purchase): N/A

## 5. Delivery lead time and location

Lead time after purchase order / contract execution: It really depends on when the purchase order to proceed is issued. I would say April of 2027

Origin / location from which completed truck will be delivered: Portsmouth, Va

## 6. Manufacturer, dealer and extended warranties

| Coverage provider / equipment | Duration                | Coverage and exclusions                                     | Optional price |
|-------------------------------|-------------------------|-------------------------------------------------------------|----------------|
| Freightliner 114SD Plus       | One year                | Standard Chassis Warranty                                   | \$ N/A         |
| Detroit DD13 Engine           | 2 years Unlimited Miles | Standard Engine Warranty                                    | \$ N/A         |
| Galfab 60K 24ft Hoist         | 24 Months               | Defects in materials and workmanship, subject to exclusions | \$ N/A         |

Warranty claim procedure / limitations and extended warranty options available upon request.

## 7. Authorized service locations, parts and warranty support

Authorized service facilities near Barkhamstead, CT include Hartford Truck Center & Sanitary Equipment Company (Galfab distributors) and for the Freightliner chassis, Freightliner of Torrington, and Freightliner of Hartford. Also, ECTTS can ship parts to RRDD 1 facilities as needed.

Warranty service request and escalation proposed process: customer contacts ECTTS; ECTTS coordinates diagnosis and directs chassis/body/tarp claims to applicable authorized provider.

## 8. Proposal validity and pricing assumptions

Proposal valid through 30 days but could be extended further upon request.

Price assumptions, exclusions, escalation or changing conditions are TBD. There is additional risk for prices to change after 30 days of bid submission.

## 9. Authorized representative

Name / title: Aaron Sayles Government Sales Rep.

Telephone: 757-378-6158

Email: asayles@ectts.com

Authority to answer questions and negotiate final specifications: Aaron Sayles and Barry Rudiger, President



# Your Solution Overview

## Galfab OR60

The Outside Rail roll-off hoist is the most commonly used hoist in the industry today. GALFAB offers simple operation and dependability with casted parts and robust design features. Do more in less time safely with electronic controls, a GALFAB exclusive feature to the market.

### Customer modification

**OR60194S072F**      This model is the 24FT Hoist Specification Requested

**Hoist Capacity: 60,000 Lbs**

**Hoist Length, 194 ; Container Range 20'-24'**      50 Cubic Yard Container Compliant

**Forward Mount Lift Cylinders**

**Single Stage Lift Cylinders**

**Finish Paint - Black**

**Wing Plate from 4th Roller to Tail (Long)**

**PTO Supplier, Customer Supplies PTO**

**Pump Shaft Size, 1"-15T**

**5 Section (2A-3M) Parker Hydraulic Valve**

**Standard Lower Lift Brackets**

**Lift Cylinder Shaft: Drop Shaft**

**Platform Hydraulic Valve Mount Bracket**

**Galfab Supplies Valve Fittings**

**Galfab Supplies Valve Hoses**



48 Gallon Side Mount Hydraulic Tank

Light Bumper, Split Light Bumper

Auto Fold ICC Bumper

Tandem Axle Steel Fenders, Tarp Support

No Stationary Rear Holddown

Container Securement, 1 Set Nylon Ratchets & 1 Set Hooker System w/ Push Pull Valve

Hooker System Located Behind the Hinge

Toolbox, 48" Steel Front Load



## OR SERIES OUTSIDE RAIL HOIST

The Outside Rail roll-off hoist is the most commonly used hoist in the industry today. GALFAB offers this hoist with an 8" mainframe and 2" subframe or the very popular 10" sub frameless hoist.

Available in 60k and 75k pound models to fit any application.



Visit our website: [GALFAB.com](http://GALFAB.com) | Follow us on social media




| Call Today: 574-946-7767

# THE GALFAB ADVANTAGE



## Outboard Supported Side Rollers

Greasable Roller shaft is removable with two bolts for ease of replacement and maintenance.

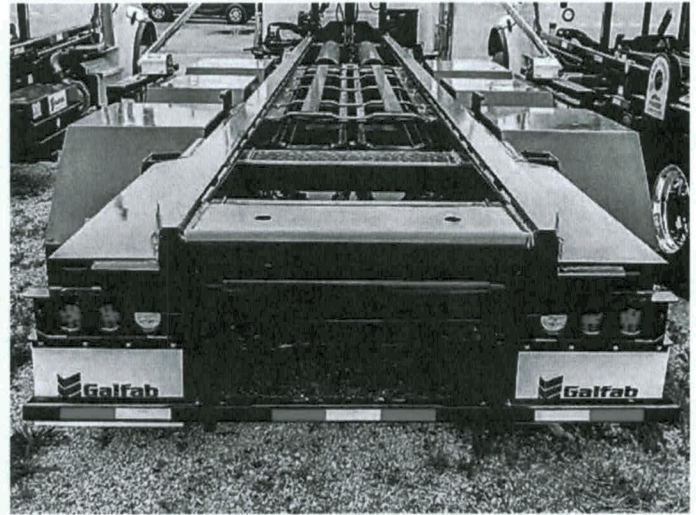


## Container Long Sill Support Rails

Rails aid in loading misaligned containers and give added support to the long sills increasing the life of your container.



## Autofold DOT Bumpers

Bumper folds forward reducing the chance of bending and hang-ups in the landfill.

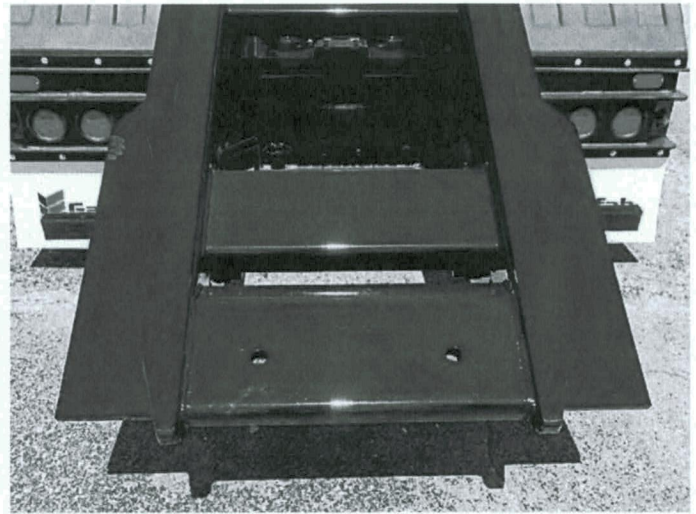

## Rear Ground Roller Cover

Standard on all Outside Rail Hoists making it easier to load and unload containers.



Visit our website: [GALFAB.com](http://GALFAB.com) | Follow us on social media




| Call Today: 574-946-7767

## STANDARD FEATURES


- 8" x 4 x 1/2" Main Frame Tube
- 3" x 2" x 1/4" Subframe
- 2 1/2" Diameter Rear Hinge
- All Working Points Greaseable
- Pintle Ready Apron
- Auto Fold Forward DOT Bumper
- 1" Spring Loaded Container Locks
- 2 1/2" Diameter Lift Cylinder Shafts
- Interchangeable 10" Vertical and Horizontal Sheaves
- 3/8 inch x 3-inch Winch Cylinder Rod Covers
- 6 Inboard and Outboard Supported Outside Rollers
- Container Long Sill Supports on Rear of Hoist Mainframe
- 48 Gallon Oil Reservoir with Sight and Temperature Gauge
- 25 Micron Filtration
- Inside and Outside Controls
- LED Lighting System
- Choice of Forward or Reverse Mount Single-Stage or Telescopic Lift Cylinders
- 7/8" Cable with Heavy Duty Swivel Eye Hook
- GALFAB Auto-fold DOT Bumper
- 48-Degree Dump Angle on all Models
- 2 Minute Loading Cycle Time\* Keeping your Drivers on the Road
- Hoist Up Alarm
- Backup Alarm

## OPTIONAL FEATURES

- Behind Cab and Oversize Oil Tanks
- Tool Boxes
- Auxiliary Stops
- Poly or Steel Fenders
- Aluminum Fenders
- Tarping Systems
- "The Hooker" Hold On System
- Ratchet Tie Down Straps
- Pintle Hook
- Front Mount Pump
- PTO
- Drop Shaft
- On Board Scale Systems
- Work Lights
- Rear View Camera Systems
- Integrated hydraulics can be used, if hydraulic tarping is used



**"The Hooker"  
Container  
Securement System**



**Auxiliary fold down  
stops**



**Hydraulic Reservoirs**



**Tool Boxes**



**Poly, Steel &  
Aluminum Fenders**

Shop all replacement parts at:

**GALFAB.com**




## OR SERIES MODELS

| Model         | Capacity | CA   | CA with tarp | Length | Dump Angle | Up (sec)* | Down (sec)* | On (sec)* | Off (sec)* | Lift Cylinder       | Winch Cylinder     | Container Length ft | Apx Weight lbs |
|---------------|----------|------|--------------|--------|------------|-----------|-------------|-----------|------------|---------------------|--------------------|---------------------|----------------|
| OR60174S072   | 60,000   | 174" | 186"         | 23'3"  | 48°        | 27        | 15          | 41        | 28         | 6" x 4" x 72" DA    | 7" x 4" x 79.5" DA | 18'-22'             | 7550           |
| OR60174S072R  | 60,000   | 174" | 186"         | 23'3"  | 48°        | 27        | 15          | 41        | 28         | 6" x 4" x 72" DA    | 7" x 4" x 79.5" DA | 18'-22'             | 7550           |
| OR60174T121   | 60,000   | 174" | 186"         | 23'3"  | 48°        | 35        | 29          | 41        | 28         | 6"-5"-4" x 121" DAT | 7" x 4" x 79.5" DA | 18'-22'             | 7225           |
| OR75174S072F7 | 75,000   | 174" | 186"         | 23'3"  | 48°        | 37        | 23          | 41        | 28         | 7" x 4" x 72" DA    | 7" x 4" x 79.5" DA | 18'-22'             | 7550           |
| OR75174S072R7 | 75,000   | 174" | 186"         | 23'3"  | 48°        | 37        | 23          | 41        | 28         | 7" x 4" x 72" DA    | 7" x 4" x 79.5" DA | 18'-22'             | 7550           |
| OR75174T121   | 75,000   | 174" | 186"         | 23'3"  | 48°        | 35        | 29          | 41        | 28         | 6"-5"-4" x 121" DAT | 7" x 4" x 79.5" DA | 18'-22'             | 7350           |
| OR60194S072   | 60,000   | 194" | 206"         | 24'11" | 48°        | 27        | 15          | 46        | 31         | 6" x 4" x 72" DA    | 7" x 4" x 89.5" DA | 20'-24'             | 7850           |
| OR60194S072R  | 60,000   | 194" | 206"         | 24'11" | 48°        | 27        | 15          | 46        | 31         | 6" x 4" x 72" DA    | 7" x 4" x 89.5" DA | 20'-24'             | 7850           |
| OR60194T121   | 60,000   | 194" | 206"         | 24'11" | 48°        | 35        | 29          | 46        | 31         | 6"-5"-4" x 121" DAT | 7" x 4" x 89.5" DA | 20'-24'             | 8075           |
| OR75194S072F7 | 75,000   | 194" | 206"         | 24'11" | 48°        | 37        | 23          | 46        | 31         | 7" x 4" x 72" DA    | 7" x 4" x 89.5" DA | 20'-24'             | 7850           |
| OR75194S072R7 | 75,000   | 194" | 206"         | 24'11" | 48°        | 37        | 23          | 46        | 31         | 7" x 4" x 72" DA    | 7" x 4" x 89.5" DA | 20'-24'             | 7850           |
| OR75194T121   | 75,000   | 194" | 206"         | 24'11" | 48°        | 35        | 29          | 46        | 31         | 6"-5"-4" x 121" DAT | 7" x 4" x 89.5" DA | 20'-24'             | 8075           |

\* Cycle Times are Factory developed and controlled by PTO output, oil viscosity, human and mechanical efficiency, and may vary accordingly.


CAUTION: This Equipment Should be Operated by Properly Trained Personnel. Improper Use, Misuse, or Lack of Maintenance Could Cause Injury to Persons or Property. Photos used in this brochure are illustrative only. We reserve the right to make changes at any time without notice. Information contained within this literature is believed to be the most accurate available at the time of printing.

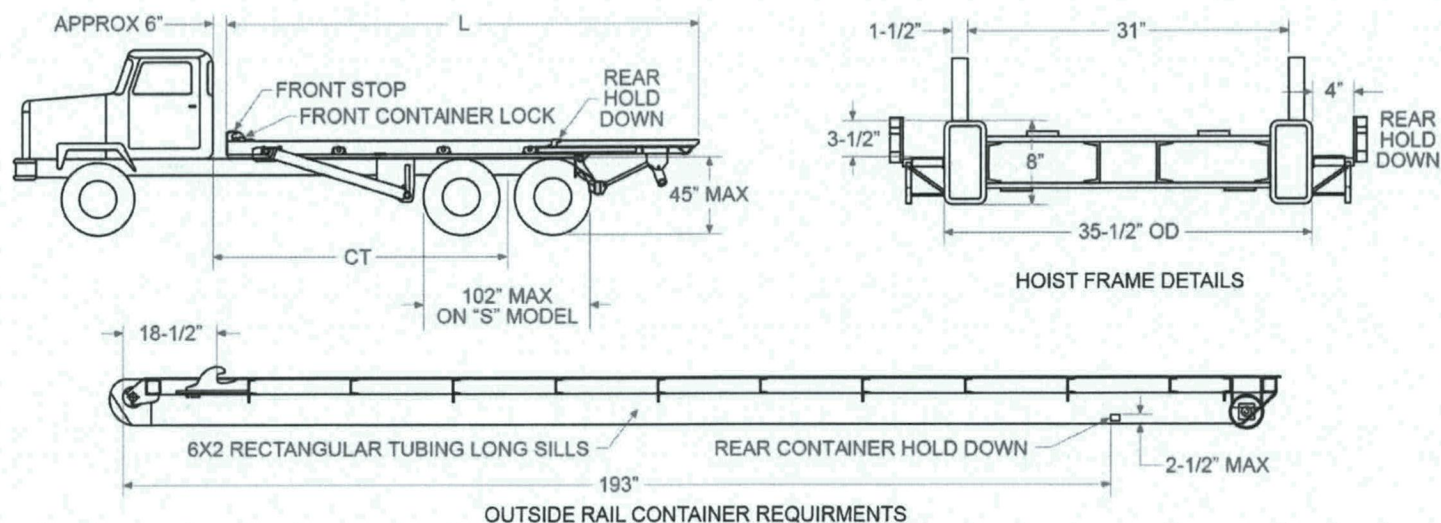

*A proposal for*  
**EAST COAST TRUCK AND TRAILER SALES**

*Oct 15, 2026*

**Freightliner 114SD Plus 13,500K Steerable Lift Axle**

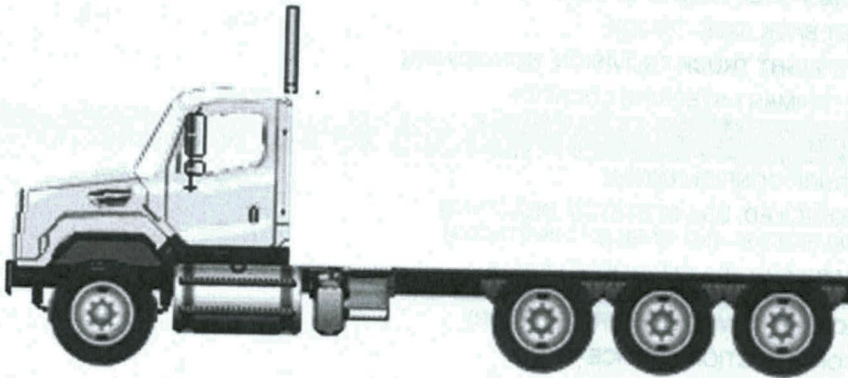

Components shown may not reflect all spec'd options and are not to scale

Application Version 12.1.306  
Data Version PRL-31D.009  
ECTT MY28 114SD PLUS DD13 525  
13.5 60k 4...



10/15/2026 1:27 PM

Page 1 of 20

## SPECIFICATION PROPOSAL

| Data Code                    | Description                                                                                         | Weight Front | Weight Rear | Retail Price |
|------------------------------|-----------------------------------------------------------------------------------------------------|--------------|-------------|--------------|
| <b>Price Level</b>           |                                                                                                     |              |             |              |
| PRL-31D                      | SD PRL-31D (EFF:MY28 ORDERS)                                                                        |              |             | STD          |
| <b>Data Version</b>          |                                                                                                     |              |             |              |
| DRL-009                      | SPECPRO21 DATA RELEASE VER 009                                                                      |              |             | N/C          |
| <b>Vehicle Configuration</b> |                                                                                                     |              |             |              |
| 001-177                      | 114SD PLUS CONVENTIONAL CHASSIS                                                                     | 7,934        | 6,476       |              |
| 004-228                      | 2028 MODEL YEAR SPECIFIED                                                                           |              |             |              |
| 002-004                      | SET BACK AXLE - TRUCK                                                                               | 480          | -480        |              |
| 019-004                      | STRAIGHT TRUCK PROVISION, NON-TOWING                                                                |              |             | STD          |
| 003-001                      | LH PRIMARY STEERING LOCATION                                                                        |              |             | STD          |
| <b>General Service</b>       |                                                                                                     |              |             |              |
| AA1-002                      | TRUCK CONFIGURATION                                                                                 |              |             | STD          |
| AA6-001                      | DOMICILED, USA 50 STATES (INCLUDING CALIFORNIA AND CARB OPT-IN STATES)                              |              |             | N/C          |
| 99D-036                      | CARB AND EPA CLEAN IDLE LABELS - (INCLUDES 6X4 INCH LABELS STACKED ON LOWER FORWARD OF DRIVER DOOR) |              |             |              |
| A85-011                      | CONSTRUCTION SERVICE                                                                                |              |             | STD          |
| A84-1GM                      | GOVERNMENT BUSINESS SEGMENT                                                                         |              |             | N/C          |
| AA4-013                      | MOIST BULK COMMODITY                                                                                |              |             | N/C          |
| AA5-002                      | TERRAIN/DUTY: 100% (ALL) OF THE TIME, IN TRANSIT, IS SPENT ON PAVED ROADS                           |              |             | STD          |
| AB1-008                      | MAXIMUM 8% EXPECTED GRADE                                                                           |              |             | STD          |
| AB5-001                      | SMOOTH CONCRETE OR ASPHALT PAVEMENT - MOST SEVERE IN-TRANSIT (BETWEEN SITES) ROAD SURFACE           |              |             | STD          |
| 995-1AE                      | FREIGHTLINER LEVEL II WARRANTY                                                                      |              |             | N/C          |
| A66-99D                      | EXPECTED FRONT AXLE(S) LOAD : 16000.0 lbs                                                           |              |             |              |
| A68-99D                      | EXPECTED REAR DRIVE AXLE(S) LOAD : 34000.0 lbs                                                      |              |             |              |
| A67-99D                      | EXPECTED PUSHER AXLE(S) LOAD : 13500.0 lbs                                                          |              |             |              |
| A63-99D                      | EXPECTED GROSS VEHICLE WEIGHT CAPACITY : 63500.0 lbs                                                |              |             |              |

| Data Code                    | Description                                                                                                  | Weight<br>Front | Weight<br>Rear | Retail Price |
|------------------------------|--------------------------------------------------------------------------------------------------------------|-----------------|----------------|--------------|
| <b>Truck Service</b>         |                                                                                                              |                 |                |              |
| AA3-010                      | ROLL OFF/ROLL ON BODY                                                                                        |                 |                | N/C          |
| AF3-2FV                      | J&J TRUCK BODIES AND TRAILERS                                                                                |                 |                | N/C          |
| AF7-99D                      | EXPECTED BODY/PAYLOAD CG HEIGHT ABOVE<br>FRAME "XX" INCHES : 32.0 in                                         |                 |                |              |
| <b>Engine</b>                |                                                                                                              |                 |                |              |
| 101-3GD                      | DETROIT DD13 GEN 6 12.8L 525 HP @ 1625<br>RPM, 1900 GOV RPM, 1850 LB-FT @ 900 RPM                            |                 |                |              |
| <b>Electronic Parameters</b> |                                                                                                              |                 |                |              |
| 79A-065                      | 65 MPH ROAD SPEED LIMIT                                                                                      |                 |                | N/C          |
| 79B-000                      | CRUISE CONTROL SPEED LIMIT SAME AS ROAD<br>SPEED LIMIT                                                       |                 |                | N/C          |
| 79F-013                      | FLEET MANAGEMENT - DAILY ENGINE USAGE<br>ENABLED                                                             |                 |                | N/C          |
| 79G-006                      | 5 MINUTES IDLE SHUTDOWN WITH CLUTCH<br>AND SERVICE BRAKE OVERRIDE                                            |                 |                | N/C          |
| 80Z-998                      | NO AUTOMATIC ENGINE SHUTDOWN - GHG                                                                           |                 |                | STD          |
| 80L-001                      | ENABLE AUTO ENGINE RPM ELEVATE FOR<br>EXTENDED IDLE                                                          |                 |                | N/C          |
| <b>Engine Equipment</b>      |                                                                                                              |                 |                |              |
| 99C-027                      | 2027 EPA/GHG27 CONFIGURATION                                                                                 |                 |                | STD          |
| 13E-001                      | STANDARD OIL PAN                                                                                             |                 |                | STD          |
| 105-001                      | ENGINE MOUNTED OIL CHECK AND FILL                                                                            |                 |                | STD          |
| 014-1B5                      | SIDE OF HOOD AIR INTAKE WITH DONALDSON<br>HIGH CAPACITY AIR CLEANER WITH SAFETY<br>ELEMENT, FIREWALL MOUNTED |                 |                | STD          |
| 124-1D7                      | DR 12V 160 AMP 28-SI QUADRAMOUNT PAD<br>ALTERNATOR WITH REMOTE BATTERY VOLT<br>SENSE                         |                 |                | STD          |
| 292-236                      | (3) DTNA GENUINE, FLOODED STARTING, MIN<br>3000CCA, 555RC, THREADED STUD BATTERIES                           |                 |                | STD          |
| 290-1CD                      | BATTERY BOX WITH ALUMINUM COVER<br>MOUNTED SHORT SIDE TO RAIL                                                | 15              |                |              |
| 281-004                      | BATTERY JUMPERS WITH MEGA FUSE<br>JUNCTION BLOCK (MFJB)                                                      | 4               |                |              |
| 282-003                      | SINGLE BATTERY BOX FRAME MOUNTED LH<br>SIDE BACK OF CAB                                                      |                 |                | STD          |
| 291-017                      | WIRE GROUND RETURN FOR BATTERY CABLES<br>WITH ADDITIONAL FRAME GROUND RETURN                                 |                 |                | STD          |
| 289-001                      | NON-POLISHED BATTERY BOX COVER                                                                               |                 |                | STD          |

| Data Code | Description                                                                                                                    | Weight<br>Front | Weight<br>Rear | Retail Price |
|-----------|--------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------|--------------|
| 293-058   | NON-ESSENTIAL POSITIVE LOAD DISCONNECT,<br>IN CAB CONTROL SWITCH MOUNTED<br>OUTBOARD OF DRIVER SEAT                            | 2               |                |              |
| 295-029   | POSITIVE AND NEGATIVE POSTS FOR<br>JUMPSTART LOCATED ON FRAME NEXT TO<br>STARTER                                               | 2               |                |              |
| 306-015   | PROGRESSIVE LOW VOLTAGE DISCONNECT AT<br>12.3 VOLTS FOR DESIGNATED CIRCUITS                                                    | 2               |                | STD          |
| 107-046   | BW MODEL FE-921 19.0 CFM SINGLE CYLINDER<br>AIR COMPRESSOR WITH SAFETY VALVE                                                   |                 |                | STD          |
| 152-041   | ELECTRONIC ENGINE INTEGRAL SHUTDOWN<br>PROTECTION SYSTEM                                                                       |                 |                | STD          |
| 128-002   | JACOBS COMPRESSION BRAKE                                                                                                       |                 |                | STD          |
| 016-1C2   | RH OUTBOARD UNDER STEP MOUNTED<br>HORIZONTAL AFTERTREATMENT SYSTEM<br>ASSEMBLY WITH RH B-PILLAR MOUNTED<br>VERTICAL TAILPIPE   | 30              | 25             |              |
| 28F-014   | ENGINE AFTERTREATMENT DEVICE,<br>AUTOMATIC OVER THE ROAD REGENERATION<br>AND VIRTUAL REGENERATION REQUEST<br>SWITCH IN CLUSTER |                 |                | STD          |
| 239-038   | 11 FOOT 06 INCH (138 INCH+0/-5.9 INCH)<br>EXHAUST SYSTEM HEIGHT                                                                |                 |                | N/C          |
| 237-1CR   | RH CURVED VERTICAL TAILPIPE B-PILLAR<br>MOUNTED ROUTED FROM STEP                                                               |                 |                | N/C          |
| 23U-002   | 13 GALLON DIESEL EXHAUST FLUID TANK                                                                                            |                 |                | STD          |
| 30N-003   | 100 PERCENT DIESEL EXHAUST FLUID FILL                                                                                          |                 |                | STD          |
| 23Y-001   | STANDARD DIESEL EXHAUST FLUID PUMP<br>MOUNTING                                                                                 |                 |                | STD          |
| 43X-002   | LH MEDIUM DUTY STANDARD DIESEL EXHAUST<br>FLUID TANK LOCATION                                                                  |                 |                | STD          |
| 43Y-001   | STANDARD DIESEL EXHAUST FLUID TANK CAP                                                                                         |                 |                | STD          |
| 242-001   | STAINLESS STEEL AFTERTREATMENT<br>DEVICE/MUFFLER/TAILOPIPE SHIELD                                                              |                 |                |              |
| 273-058   | AIR POWERED ON/OFF ENGINE FAN CLUTCH                                                                                           |                 |                | STD          |
| 276-001   | AUTOMATIC FAN CONTROL WITHOUT DASH<br>SWITCH, NON ENGINE MOUNTED                                                               |                 |                | STD          |
| 110-068   | DDC SUPPLIED ENGINE MOUNTED FUEL<br>FILTER/FUEL WATER SEPARATOR WITH<br>WATER-IN-FUEL INDICATOR                                |                 |                | STD          |
| 118-001   | FULL FLOW OIL FILTER                                                                                                           |                 |                | STD          |
| 120-998   | NO COOLANT FILTER                                                                                                              | -10             |                | STD          |
| 266-107   | 1400 SQUARE INCH VOCATIONAL RADIATOR                                                                                           |                 |                | STD          |
| 103-039   | ANTIFREEZE TO -34F, OAT (NITRITE AND<br>SILICATE FREE) EXTENDED LIFE COOLANT                                                   |                 |                | STD          |

| Data Code                     | Description                                                                                                         | Weight<br>Front | Weight<br>Rear | Retail Price |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------|-----------------|----------------|--------------|
| 171-007                       | GATES BLUE STRIPE COOLANT HOSES OR EQUIVALENT                                                                       |                 |                | STD          |
| 172-001                       | CONSTANT TENSION HOSE CLAMPS FOR COOLANT HOSES                                                                      |                 |                | STD          |
| 261-001                       | STANDARD CHARGE AIR COOLER PLUMBING                                                                                 |                 |                | STD          |
| 270-023                       | HDEP FIXED RATIO COOLANT PUMP AND RADIATOR DRAIN VALVE                                                              |                 |                | STD          |
| 138-005                       | PHILLIPS-TEMRO 1500 WATT/115 VOLT BLOCK HEATER                                                                      | 4               |                |              |
| 140-022                       | CHROME ENGINE HEATER RECEPTACLE MOUNTED UNDER LH DOOR                                                               |                 |                |              |
| 155-076                       | DELCO 12V MOD 3.175-39MT+ STARTER WITH ENGINE ECU SOFTWARE PROTECTION AND INTEGRATED MAGNETIC SWITCH                | -45             |                | STD          |
| <b>Transmission</b>           |                                                                                                                     |                 |                |              |
| 342-1M3                       | ALLISON 4500 RDS AUTOMATIC TRANSMISSION WITH PTO PROVISION                                                          | 260             | 100            |              |
| <b>Transmission Equipment</b> |                                                                                                                     |                 |                |              |
| 343-339                       | ALLISON VOCATIONAL PACKAGE 223 - AVAILABLE ON 3000/4000 PRODUCT FAMILIES WITH VOCATIONAL MODELS RDS, HS, MH AND TRV |                 |                | STD          |
| 84B-012                       | ALLISON VOCATIONAL RATING FOR ON/OFF HIGHWAY APPLICATIONS AVAILABLE WITH ALL PRODUCT FAMILIES                       |                 |                | STD          |
| 84C-023                       | PRIMARY MODE GEARS, LOWEST GEAR 1, START GEAR 1, HIGHEST GEAR 6, AVAILABLE FOR 3000/4000 PRODUCT FAMILIES ONLY      |                 |                | STD          |
| 84D-023                       | SECONDARY MODE GEARS, LOWEST GEAR 1, START GEAR 1, HIGHEST GEAR 6, AVAILABLE FOR 3000/4000 PRODUCT FAMILIES ONLY    |                 |                | STD          |
| 84E-000                       | PRIMARY SHIFT SCHEDULE RECOMMENDED BY DTNA AND ALLISON, THIS DEFINED BY ENGINE AND VOCATIONAL USAGE                 |                 |                | STD          |
| 84F-000                       | SECONDARY SHIFT SCHEDULE RECOMMENDED BY DTNA AND ALLISON, THIS DEFINED BY ENGINE AND VOCATIONAL USAGE               |                 |                | STD          |
| 84G-000                       | PRIMARY SHIFT SPEED RECOMMENDED BY DTNA AND ALLISON, THIS DEFINED BY ENGINE AND VOCATIONAL USAGE                    |                 |                | STD          |
| 84H-000                       | SECONDARY SHIFT SPEED RECOMMENDED BY DTNA AND ALLISON, THIS DEFINED BY ENGINE AND VOCATIONAL USAGE                  |                 |                | STD          |
| 84J-000                       | ENGINE BRAKE RANGE PRESELECT RECOMMENDED BY DTNA AND ALLISON, THIS DEFINED BY ENGINE AND VOCATIONAL USAGE           |                 |                | STD          |

| Data Code | Description                                                                      | Weight<br>Front | Weight<br>Rear | Retail Price |
|-----------|----------------------------------------------------------------------------------|-----------------|----------------|--------------|
| 84K-002   | 2ND GEAR ENGINE BRAKE ALTERNATE<br>PRESELECT WITH MODERATE DOWNSHIFT<br>STRATEGY |                 |                | STD          |
| 84N-200   | FUEL SENSE 2.0 DISABLED - PERFORMANCE -<br>TABLE BASED                           |                 |                | STD          |
| 84U-000   | DRIVER SWITCH INPUT - DEFAULT - NO<br>SWITCHES                                   |                 |                | STD          |
| 353-079   | QUICKFIT BODY LIGHTING CONNECTOR UNDER<br>CAB, WITHOUT CAP                       |                 |                |              |
| 34C-011   | ELECTRONIC TRANSMISSION WIRING TO<br>CUSTOMER INTERFACE CONNECTOR                |                 |                |              |
| 341-018   | MAGNETIC PLUGS, ENGINE DRAIN,<br>TRANSMISSION DRAIN, AXLE(S) FILL AND<br>DRAIN   |                 |                | STD          |
| 345-003   | PUSH BUTTON ELECTRONIC SHIFT CONTROL,<br>DASH MOUNTED                            |                 |                |              |
| 97G-004   | TRANSMISSION PROGNOSTICS - ENABLED 2013                                          |                 |                | STD          |
| 370-011   | WATER TO OIL TRANSMISSION COOLER,<br>FRAME MOUNTED                               |                 |                | STD          |
| 346-003   | TRANSMISSION OIL CHECK AND FILL WITH<br>ELECTRONIC OIL LEVEL CHECK               |                 |                | STD          |
| 35T-001   | ATF-SYNTHETIC AUTOMATIC TRANSMISSION<br>FLUID                                    |                 |                | STD          |

#### PTO Equipment and Parameters

|         |                                                                                                            |    |  |     |
|---------|------------------------------------------------------------------------------------------------------------|----|--|-----|
| 372-123 | PTO CONTROLS FOR ENHANCED VEHICLE<br>ELECTRIC/ELECTRONIC ARCHITECTURE                                      |    |  |     |
| 362-2JT | CUSTOMER INSTALLED CHELSEA 281 SERIES<br>PTO                                                               | 50 |  | N/C |
| 363-001 | PTO MOUNTING, LH SIDE OF MAIN<br>TRANSMISSION ALLISON & ZF                                                 |    |  | N/C |
| 80S-018 | PTO 1, WITH SWITCH, TEM SUPPLIED REQUEST<br>AND INTERLOCKS, WITH PTO CONNECTIONS,<br>NO FACTORY INTERLOCKS |    |  | N/C |
| 80G-015 | PTO MINIMUM RPM - 800                                                                                      |    |  | N/C |
| 79P-032 | PTO RPM CONTROL WITH STEERING WHEEL<br>SWITCHES                                                            |    |  | N/C |
| 79W-001 | ONE REMOTE PTO SPEED                                                                                       |    |  | N/C |
| 79X-005 | PTO SPEED 1 SETTING - 900 RPM                                                                              |    |  | N/C |
| 79K-009 | PTO MODE ENGINE RPM LIMIT - 1200 RPM                                                                       |    |  | N/C |
| 79T-004 | PTO MODE RPM INCREMENT - 100 RPM                                                                           |    |  | N/C |
| 79U-001 | PTO GOVERNOR RAMP RATE - 25 RPM PER<br>SECOND                                                              |    |  | N/C |

#### Front Axle and Equipment

| Data Code                      | Description                                                                                                    | Weight<br>Front | Weight<br>Rear | Retail Price |
|--------------------------------|----------------------------------------------------------------------------------------------------------------|-----------------|----------------|--------------|
| 400-1AC                        | MERITOR MFS-20-133A 20,000# FL1 71.0 INCH<br>KPI/3.74 INCH DROP SINGLE FRONT AXLE                              | 260             |                |              |
| 402-030                        | MERITOR 16.5X6 Q+ CAST SPIDER CAM FRONT<br>BRAKES, DOUBLE ANCHOR, FABRICATED<br>SHOES                          | 10              |                | N/C          |
| 403-002                        | NON-ASBESTOS FRONT BRAKE LINING                                                                                |                 |                | STD          |
| 419-023                        | CONMET CAST IRON FRONT BRAKE DRUMS                                                                             |                 |                | \$8.00       |
| 409-006                        | FRONT OIL SEALS                                                                                                |                 |                | STD          |
| 408-001                        | VENTED FRONT HUB CAPS WITH WINDOW,<br>CENTER AND SIDE PLUGS - OIL                                              |                 |                | STD          |
| 416-022                        | STANDARD SPINDLE NUTS FOR ALL AXLES                                                                            |                 |                | STD          |
| 405-002                        | MERITOR AUTOMATIC FRONT SLACK<br>ADJUSTERS                                                                     |                 |                | STD          |
| 406-001                        | STANDARD KING PIN BUSHINGS                                                                                     |                 |                | STD          |
| 536-055                        | TRW THP-60 POWER STEERING WITH RCH45<br>AUXILIARY GEAR                                                         | 130             |                | N/C          |
| 539-003                        | POWER STEERING PUMP                                                                                            |                 |                | STD          |
| 534-003                        | 4 QUART POWER STEERING RESERVOIR                                                                               |                 |                | N/C          |
| 533-001                        | OIL/AIR POWER STEERING COOLER                                                                                  |                 |                | N/C          |
| 40T-001                        | MINERAL SAE 80/90 FRONT AXLE LUBE                                                                              |                 |                | STD          |
| <b>Front Suspension</b>        |                                                                                                                |                 |                |              |
| 620-025                        | 20,000# TAPERLEAF FRONT SUSPENSION                                                                             | 200             |                |              |
| 619-005                        | MAINTENANCE FREE RUBBER BUSHINGS -<br>FRONT SUSPENSION                                                         |                 |                | STD          |
| 410-001                        | FRONT SHOCK ABSORBERS                                                                                          |                 |                | STD          |
| <b>Rear Axle and Equipment</b> |                                                                                                                |                 |                |              |
| 420-103                        | MERITOR RT-46-160 46,000# R-SERIES TANDEM<br>REAR AXLE                                                         |                 | 420            |              |
| 421-373                        | 3.73 REAR AXLE RATIO                                                                                           |                 |                | N/C          |
| 424-001                        | IRON REAR AXLE CARRIER WITH STANDARD<br>AXLE HOUSING                                                           |                 |                | STD          |
| 386-011                        | SPL170 XL DANA SPICER MAIN DRIVELINE WITH<br>HALF ROUND YOKES                                                  | 45              | 45             |              |
| 388-012                        | SPL170 XL DANA SPICER INTERAXLE<br>DRIVELINE WITH HALF ROUND YOKES                                             |                 | 10             |              |
| 452-006                        | DRIVER CONTROLLED TRACTION<br>DIFFERENTIAL - BOTH TANDEM REAR AXLES                                            |                 | 30             |              |
| 878-023                        | (1) INTERAXLE LOCK VALVE, (1) DRIVER<br>CONTROLLED DIFFERENTIAL LOCK FORWARD-<br>REAR AND REAR-REAR AXLE VALVE |                 |                | N/C          |
| 87A-005                        | INDICATOR LIGHT FOR EACH INTERAXLE<br>LOCKOUT SWITCH                                                           |                 |                | N/C          |

| Data Code | Description                                                                            | Weight Front | Weight Rear | Retail Price |
|-----------|----------------------------------------------------------------------------------------|--------------|-------------|--------------|
| 87B-015   | INDICATOR LIGHT FOR EACH DIFFERENTIAL LOCKOUT SWITCH, ENGAGE <5 MPH, DISENGAGE >25 MPH |              |             | N/C          |
| 423-019   | MERITOR 16.5X8.62 Q+ CAST SPIDER CAM REAR BRAKES, DOUBLE ANCHOR, FABRICATED SHOES      |              |             |              |
| 433-002   | NON-ASBESTOS REAR BRAKE LINING                                                         |              |             | STD          |
| 434-019   | ASPHALT SPREADER CLEARANCE REAR BRAKE GEOMETRY                                         |              |             | N/C          |
| 451-001   | CAST IRON OUTBOARD REAR BRAKE DRUMS                                                    |              | 40          | STD          |
| 440-006   | REAR OIL SEALS                                                                         |              |             | STD          |
| 426-101   | WABCO TRISTOP D LONGSTROKE 2-DRIVE AXLE SPRING PARKING CHAMBERS                        |              |             | STD          |
| 428-003   | HALDEX AUTOMATIC REAR SLACK ADJUSTERS                                                  |              |             |              |
| 41T-002   | CURRENT AVAILABLE SYNTHETIC 75W-90 REAR AXLE LUBE                                      |              |             | STD          |
| 42T-001   | STANDARD REAR AXLE BREATHER(S)                                                         |              |             | STD          |

#### Rear Suspension

|         |                                                                       |  |     |     |
|---------|-----------------------------------------------------------------------|--|-----|-----|
| 622-312 | HENDRICKSON HAULMAAX EX 46,000# REAR SUSPENSION                       |  | 120 |     |
| 621-1AP | HENDRICKSON HAULMAAX/ULTIMAAX - 10.50" RIDE HEIGHT                    |  |     | N/C |
| 624-009 | 54 INCH AXLE SPACING                                                  |  |     | N/C |
| 628-010 | HENDRICKSON HN, HAULMAAX AND ULTIMAAX SERIES STEEL BEAMS WITH BAR PIN |  |     | N/C |
| 623-016 | STANDARD DUTY FORE/AFT AND HEAVY DUTY TRANSVERSE CONTROL RODS         |  |     | N/C |
| 625-008 | DOUBLE REBOUND STRAP - INBOARD AND OUTBOARD                           |  | 13  |     |
| 439-002 | REAR SHOCK ABSORBERS - TWO AXLES (TANDEM)                             |  | 60  |     |

#### Pusher / Tag Equipment

|         |                                                                                |     |     |     |
|---------|--------------------------------------------------------------------------------|-----|-----|-----|
| 035-128 | HENDRICKSON EX13 COMP 13,500# AIR LIFT STEERABLE PUSHER SUSPENSION, FF1 AXLE   | 460 | 860 |     |
| 443-126 | HENDRICKSON EX13 COMP 13,500# FF1 STEERABLE INTEGRAL PUSHER AXLE               |     |     | N/C |
| 874-015 | (1) DASH VALVE AND (1) PHYSICAL GAUGE FOR SINGLE LIFT AXLE                     |     |     | N/C |
| 87F-005 | LIFT AXLE WIRING, LIFT IN REVERSE, WITH LAST STATE RETENTION WITH IGNITION OFF |     |     | N/C |
| 896-014 | (1)REGULATOR MOUNTED ON CHASSIS FOR SINGLE LIFT AXLE                           |     |     | N/C |

| Data Code | Description                                                                   | Weight<br>Front | Weight<br>Rear | Retail Price |
|-----------|-------------------------------------------------------------------------------|-----------------|----------------|--------------|
| 456-1AE   | HENDRICKSON 15X4 CAM PUSHER/TAG<br>BRAKES, DOUBLE ANCHOR, FABRICATED<br>SHOES |                 |                | N/C          |
| 457-002   | NON-ASBESTOS PUSHER/TAG BRAKE LINING                                          |                 |                | N/C          |
| 448-023   | CONMET CAST IRON PUSHER/TAG BRAKE<br>DRUMS                                    |                 |                | N/C          |
| 429-998   | NO PUSHER/TAG BRAKE DUST SHIELDS                                              |                 |                |              |
| 442-016   | PUSHER/TAG OIL SEALS                                                          |                 |                | N/C          |
| 444-001   | VENTED PUSHER/TAG HUB CAPS WITH<br>WINDOW, CENTER AND SIDE PLUGS - OIL        |                 |                | N/C          |
| 445-075   | HALDEX LONGSTROKE PUSHER/TAG AXLE<br>SERVICE CHAMBERS                         |                 |                | N/C          |
| 458-003   | HALDEX AUTOMATIC PUSHER/TAG SLACK<br>ADJUSTERS                                |                 |                | N/C          |
| 626-131   | HENDRICKSON EX13 COMP 13,500# AIR LIFT<br>STEERABLE PUSHER SUSPENSION         |                 |                | N/C          |
| 627-005   | 51 INCH AXLE SPACING PUSHER/TAG                                               |                 |                | N/C          |

#### Brake System

|         |                                                                                                                            |  |  |     |
|---------|----------------------------------------------------------------------------------------------------------------------------|--|--|-----|
| 490-100 | WABCO 4S/4M ABS                                                                                                            |  |  |     |
| 871-001 | REINFORCED NYLON, FABRIC BRAID AND WIRE<br>BRAID CHASSIS AIR LINES                                                         |  |  | STD |
| 46E-001 | STANDARD AIR MANAGEMENT UNIT                                                                                               |  |  | STD |
| 904-001 | FIBER BRAID PARKING BRAKE HOSE                                                                                             |  |  | STD |
| 412-001 | STANDARD BRAKE SYSTEM VALVES                                                                                               |  |  | STD |
| 46D-002 | STANDARD AIR SYSTEM PRESSURE<br>PROTECTION SYSTEM                                                                          |  |  | STD |
| 413-002 | STD U.S. FRONT BRAKE VALVE                                                                                                 |  |  | STD |
| 432-014 | (2) RELAY VALVES; ONE 5-8 PSI FOR TANDEM<br>AXLE AND ONE 3-4.5 PSI CRACK FOR<br>PUSHER/TAG                                 |  |  | N/C |
| 480-088 | WABCO SYSTEM SAVER HP WITH INTEGRAL<br>AIR GOVERNOR AND HEATER                                                             |  |  | STD |
| 479-003 | AIR DRYER MOUNTED INBOARD ON LH RAIL                                                                                       |  |  | N/C |
| 460-1AU | STEEL AIR TANKS MOUNTED AFT INSIDE<br>AND/OR BELOW FRAME JUST FORWARD OF<br>REAR SUSPENSION, NO TRIPLE OR TORPEDO<br>TANKS |  |  |     |
| 477-001 | PULL CABLE ON WET TANK, PETCOCK DRAIN<br>VALVES ON ALL OTHER AIR TANKS                                                     |  |  | STD |

#### Trailer Connections

|         |                               |  |  |     |
|---------|-------------------------------|--|--|-----|
| 476-998 | NO AIR HOSE HANGER            |  |  | STD |
| 1AZ-998 | NO TRAILER RECEPTACLE BRACKET |  |  | STD |

| Data Code                    | Description                                                                                                 | Weight<br>Front | Weight<br>Rear | Retail Price |
|------------------------------|-------------------------------------------------------------------------------------------------------------|-----------------|----------------|--------------|
| <b>Wheelbase &amp; Frame</b> |                                                                                                             |                 |                |              |
| 545-667                      | 6675MM (263 INCH) WHEELBASE                                                                                 |                 |                | N/C          |
| 546-1B2                      | 1/2X3.64X11-7/8 INCH STEEL FRAME<br>(12.7MMX301.6MM/0.5X11.88 INCH) 120KSI                                  | 710             | 320            |              |
| 547-001                      | 1/4 INCH (6.35MM) C-CHANNEL INNER FRAME<br>REINFORCEMENT                                                    | 267             | 454            |              |
| 552-014                      | 1900MM (75 INCH) REAR FRAME OVERHANG                                                                        |                 |                | N/C          |
| 55W-007                      | FRAME OVERHANG RANGE: 71 INCH TO 80<br>INCH                                                                 | -30             | 140            | N/C          |
| AC8-99D                      | CALC'D BACK OF CAB TO REAR SUSP C/L (CA) :<br>197.24 in                                                     |                 |                |              |
| AE8-99D                      | CALCULATED EFFECTIVE BACK OF CAB TO<br>REAR SUSPENSION C/L (CA) : 183.46 in                                 |                 |                |              |
| AE4-99D                      | CALC'D FRAME LENGTH - OVERALL : 367.71 in                                                                   |                 |                |              |
| FSS-0LH                      | CALCULATED FRAME SPACE LH SIDE : 39.59 in                                                                   |                 |                | N/C          |
| FSS-0RH                      | CALCULATED FRAME SPACE RH SIDE : 95.07 in                                                                   |                 |                | N/C          |
| AM6-99D                      | CALC'D SPACE AVAILABLE FOR DECKPLATE :<br>0.0 in                                                            |                 |                |              |
| 553-001                      | SQUARE END OF FRAME                                                                                         |                 |                | STD          |
| 550-001                      | FRONT CLOSING CROSSMEMBER                                                                                   |                 |                | STD          |
| 559-001                      | STANDARD WEIGHT ENGINE CROSSMEMBER                                                                          |                 |                | STD          |
| 562-001                      | STANDARD MIDSHIP #1 CROSSMEMBER(S)                                                                          |                 |                | STD          |
| 572-001                      | STANDARD REARMOST CROSSMEMBER                                                                               |                 |                | STD          |
| 565-001                      | STANDARD SUSPENSION CROSSMEMBER                                                                             |                 |                | STD          |
| <b>Chassis Equipment</b>     |                                                                                                             |                 |                |              |
| 556-1E7                      | 14 INCH PAINTED STEEL SEVERE DUTY<br>BUMPER                                                                 | 125             | -15            |              |
| 558-070                      | REMOVABLE FRONT TOW/RECOVERY<br>DEVICE,STORED ON CHASSIS FRAME                                              | 15              |                |              |
| 574-001                      | BUMPER MOUNTING FOR SINGLE LICENSE<br>PLATE                                                                 |                 |                | STD          |
| 585-998                      | NO MUDFLAP BRACKETS                                                                                         |                 |                | STD          |
| 590-998                      | NO REAR MUDFLAPS                                                                                            |                 |                | STD          |
| 551-007                      | GRADE 8 THREADED HEX HEADED FRAME<br>FASTENERS                                                              |                 |                | STD          |
| 44Z-002                      | EXTERIOR HARNESSES WRAPPED IN<br>ABRASION TAPE                                                              |                 |                | STD          |
| 607-018                      | CLEAR FRAME RAIL FROM BACK OF CAB TO<br>FRONT REAR SUSPENSION BRACKET, RH RAIL<br>INSIDE/OUTBOARD AND BELOW |                 |                |              |
| <b>Fifth Wheel</b>           |                                                                                                             |                 |                |              |
| 578-998                      | NO FIFTH WHEEL                                                                                              |                 |                | STD          |

| Data Code         | Description                                                                          | Weight<br>Front | Weight<br>Rear | Retail Price |
|-------------------|--------------------------------------------------------------------------------------|-----------------|----------------|--------------|
| <b>Fuel Tanks</b> |                                                                                      |                 |                |              |
| 204-155           | 90 GALLON/340 LITER ALUMINUM FUEL TANK - LH                                          | 15              |                |              |
| 218-006           | 25 INCH DIAMETER FUEL TANK(S)                                                        |                 |                | STD          |
| 215-005           | PLAIN ALUMINUM/PAINTED STEEL FUEL/HYDRAULIC TANK(S) WITH PAINTED BANDS               |                 |                | STD          |
| 212-007           | FUEL TANK(S) FORWARD                                                                 |                 |                | STD          |
| 664-001           | PLAIN STEP FINISH                                                                    |                 |                | STD          |
| 205-001           | FUEL TANK CAP(S)                                                                     |                 |                | STD          |
| 122-125           | DAVCO 385 FUEL/WATER SEPARATOR WITH ESOC AND 12 VOLT AND 120 VOLT PREHEATER          | 10              |                |              |
| 216-020           | EQUIFLO INBOARD FUEL SYSTEM                                                          |                 |                | STD          |
| 202-016           | HIGH TEMPERATURE REINFORCED NYLON FUEL LINE                                          |                 |                | STD          |
| 221-008           | FUEL COOLER MOUNTED LEFT HAND IN RAIL                                                | 10              |                |              |
| <b>Tires</b>      |                                                                                      |                 |                |              |
| 093-1XJ           | BRIDGESTONE M870 315/80R22.5 20 PLY RADIAL FRONT TIRES                               | 96              |                |              |
| 094-1RW           | BRIDGESTONE M726ELA 11R22.5 14 PLY RADIAL REAR TIRES                                 |                 | 152            |              |
| 095-14G           | BRIDGESTONE R213 ECOPIA 11R22.5 16 PLY RADIAL PUSHER/TAG TIRES                       |                 | 6              |              |
| <b>Hubs</b>       |                                                                                      |                 |                |              |
| 418-060           | CONMET PRESET PLUS PREMIUM IRON FRONT HUBS                                           |                 |                | STD          |
| 450-060           | CONMET PRESET PLUS PREMIUM IRON REAR HUBS                                            |                 |                | STD          |
| 449-060           | CONMET PRESET PLUS PREMIUM IRON PUSHER/TAG HUBS                                      |                 |                | N/C          |
| <b>Wheels</b>     |                                                                                      |                 |                |              |
| 502-664           | ALCOA ULTRA ONE 89U63X 22.5X9.00 10-HUB PILOT 3.12 INSET 10-HD ALUMINUM FRONT WHEELS | -44             |                |              |
| 505-1HB           | ALCOA 88167X 22.5X8.25 10-HUB PILOT ALUMINUM DISC REAR WHEELS                        |                 | -248           |              |
| 509-1HB           | ALCOA 88167X 22.5X8.25 5.81 INSET 10-HUB ALUMINUM DISC PUSHER/TAG WHEELS             |                 | -62            |              |
| 496-011           | FRONT WHEEL MOUNTING NUTS                                                            |                 |                | STD          |
| 497-011           | REAR WHEEL MOUNTING NUTS                                                             |                 |                | STD          |
| 495-011           | PUSHER/TAG WHEEL MTG NUTS                                                            |                 |                | N/C          |

| Data Code           | Description                                                                   | Weight<br>Front | Weight<br>Rear | Retail Price |
|---------------------|-------------------------------------------------------------------------------|-----------------|----------------|--------------|
| <b>Cab Exterior</b> |                                                                               |                 |                |              |
| 829-1A2             | 114 INCH BBC FLAT ROOF ALUMINUM CONVENTIONAL CAB                              |                 |                | STD          |
| 650-008             | AIR CAB MOUNTING                                                              |                 |                | STD          |
| 648-002             | NONREMOVABLE BUGSCREEN MOUNTED BEHIND GRILLE                                  |                 |                | STD          |
| 667-004             | FRONT FENDERS SET-BACK AXLE                                                   |                 |                | N/C          |
| 754-017             | BOLT-ON MOLDED FLEXIBLE FENDER EXTENSIONS                                     | 10              |                |              |
| 678-001             | LH AND RH GRAB HANDLES                                                        |                 |                | STD          |
| 646-041             | STATIONARY BLACK GRILLE                                                       |                 |                | STD          |
| 65X-004             | BLACK HOOD MOUNTED AIR INTAKE GRILLE                                          |                 |                | STD          |
| 644-004             | FIBERGLASS HOOD                                                               |                 |                | STD          |
| 652-001             | FREIGHTLINER NAME PLATES                                                      |                 |                | STD          |
| 690-017             | HOOD LINER, ADDED FIREWALL AND FLOOR HEAT INSULATION                          | 5               |                |              |
| 727-1AF             | SINGLE 14 INCH ROUND HADLEY AIR HORN UNDER LH DECK                            |                 |                |              |
| 726-002             | DUAL ELECTRIC HORNS                                                           |                 |                |              |
| 575-001             | REAR LICENSE PLATE MOUNT END OF FRAME                                         |                 |                |              |
| 327-012             | SWITCH, INDICATOR LIGHT AND WIRING FOR (2) CUSTOMER FURNISHED BEACONS         |                 |                |              |
| 312-068             | HALOGEN COMPOSITE HEADLAMPS WITH BLACK BEZELS                                 |                 |                | STD          |
| 302-047             | LED AERODYNAMIC MARKER LIGHTS                                                 |                 |                | STD          |
| 311-001             | DAYTIME RUNNING LIGHTS                                                        |                 |                | STD          |
| 294-1AY             | INTEGRAL LED STOP/TAIL/BACKUP LIGHTS                                          |                 |                |              |
| 300-015             | STANDARD FRONT TURN SIGNAL LAMPS                                              |                 |                | STD          |
| 744-1BK             | DUAL WEST COAST MOLDED-IN COLOR HEATED MIRRORS WITH LH AND RH REMOTE          |                 |                | STD          |
| 797-001             | DOOR MOUNTED MIRRORS                                                          |                 |                | STD          |
| 796-001             | 102 INCH EQUIPMENT WIDTH                                                      |                 |                | STD          |
| 743-1AP             | LH AND RH 8 INCH MOLDED-IN COLOR CONVEX MIRRORS MOUNTED UNDER PRIMARY MIRRORS |                 |                | STD          |
| 74A-001             | RH DOWN VIEW MIRROR                                                           |                 |                |              |
| 729-001             | STANDARD SIDE/REAR REFLECTORS                                                 |                 |                |              |
| 677-054             | RH AFTERTREATMENT SYSTEM CAB ACCESS WITH PLAIN DIAMOND PLATE COVER            |                 |                |              |
| 768-043             | 63X14 INCH TINTED REAR WINDOW                                                 |                 |                | STD          |
| 661-003             | TINTED DOOR GLASS LH AND RH WITH TINTED NON-OPERATING WING WINDOWS            |                 |                | STD          |

| Data Code           | Description                                                                                                | Weight<br>Front | Weight<br>Rear | Retail Price |
|---------------------|------------------------------------------------------------------------------------------------------------|-----------------|----------------|--------------|
| 654-011             | RH AND LH ELECTRIC POWERED WINDOWS                                                                         |                 |                | STD          |
| 663-013             | 1-PIECE SOLAR GREEN GLASS WINDSHIELD                                                                       |                 |                | STD          |
| 659-026             | 2 GALLON WINDSHIELD WASHER RESERVOIR<br>WITH FLUID LEVEL INDICATOR, MOUNTED<br>UNDER CAB, WITH REMOTE FILL |                 |                | STD          |
| 647-001             | WHITE WINTERFRONT                                                                                          | 2               |                |              |
| <b>Cab Interior</b> |                                                                                                            |                 |                |              |
| 055-017             | PROFESSIONAL TRIM PACKAGE                                                                                  |                 |                | N/C          |
| 707-105             | MIST AND CARBON CLOTH INTERIOR<br>"PROFESSIONAL"                                                           |                 |                | N/C          |
| 70K-016             | CARBON WITH BASE BLACK ACCENT                                                                              |                 |                |              |
| 706-013             | MOLDED DOOR PANEL                                                                                          |                 |                | STD          |
| 708-013             | MOLDED PLASTIC DOOR PANEL                                                                                  |                 |                | STD          |
| 772-006             | BLACK MATS WITH SINGLE INSULATION                                                                          |                 |                | STD          |
| 785-034             | ASH CUP AND (1)LIGHTER, (1)12V POWER<br>OUTLET, (1)DASH MTD DUAL USB-C OUTLET                              |                 |                |              |
| 691-001             | FORWARD ROOF MOUNTED CONSOLE                                                                               |                 |                | STD          |
| 693-019             | LH AND RH DOOR STORAGE POCKETS<br>INTEGRATED INTO MOLDED DOOR PANELS                                       |                 |                | STD          |
| 738-021             | DIGITAL ALARM CLOCK IN DRIVER DISPLAY                                                                      |                 |                | STD          |
| 742-007             | (2) CUP HOLDERS LH AND RH DASH                                                                             |                 |                | STD          |
| 680-029             | M2/SD DASH                                                                                                 |                 |                | STD          |
| 720-002             | 2-1/2 LB. FIRE EXTINGUISHER                                                                                | 5               |                |              |
| 700-002             | HEATER, DEFROSTER AND AIR CONDITIONER                                                                      |                 |                | STD          |
| 701-001             | STANDARD HVAC DUCTING                                                                                      |                 |                | STD          |
| 703-005             | MAIN HVAC CONTROLS WITH RECIRCULATION<br>SWITCH                                                            |                 |                | STD          |
| 170-045             | STANDARD HEATER PLUMBING WITH BALL<br>SHUTOFF VALVES AT SUPPLY LINES ONLY                                  |                 |                |              |
| 130-041             | VALEO HEAVY DUTY A/C REFRIGERANT<br>COMPRESSOR                                                             |                 |                | STD          |
| 702-002             | BINARY CONTROL, R-134A                                                                                     |                 |                | STD          |
| 739-034             | PREMIUM INSULATION                                                                                         |                 |                |              |
| 285-013             | SOLID-STATE CIRCUIT PROTECTION AND<br>FUSES                                                                |                 |                | STD          |
| 280-007             | 12V NEGATIVE GROUND ELECTRICAL SYSTEM                                                                      |                 |                | STD          |
| 324-1B2             | PREMIUM LED CAB LIGHTING                                                                                   |                 |                |              |
| 787-004             | REMOTE KEYLESS ENTRY AND 2<br>TRANSMITTERS                                                                 | 2               |                | STD          |
| 657-001             | DOOR LOCKS AND IGNITION SWITCH KEYED<br>THE SAME                                                           |                 |                | STD          |
| 78G-004             | KEY QUANTITY OF 4                                                                                          |                 |                |              |

| Data Code | Description                                                                                                      | Weight Front | Weight Rear | Retail Price |
|-----------|------------------------------------------------------------------------------------------------------------------|--------------|-------------|--------------|
| 655-005   | LH AND RH ELECTRIC DOOR LOCKS                                                                                    |              |             | STD          |
| 740-998   | NO MATTRESS                                                                                                      | -20          | -15         | STD          |
| 722-002   | TRIANGULAR REFLECTORS WITHOUT FLARES                                                                             | 10           |             |              |
| 756-338   | BASIC ISRINGHAUSEN HIGH BACK AIR SUSPENSION DRIVERS SEAT WITH MECHANICAL LUMBAR AND INTEGRATED CUSHION EXTENSION | 30           |             |              |
| 760-343   | 2 MAN TOOL BOX MID BACK NON SUSPENSION PASSENGER SEAT, SEATS INC                                                 | 20           |             |              |
| 759-007   | DUAL DRIVER SEAT ARMRESTS, NO PASSENGER SEAT ARMRESTS                                                            | 4            |             |              |
| 711-004   | LH AND RH INTEGRAL DOOR PANEL ARMRESTS                                                                           |              |             |              |
| 758-1AK   | BLACK VINYL DRIVER SEAT COVER                                                                                    |              |             |              |
| * 761-1AK | BLACK VINYL PASSENGER SEAT COVER                                                                                 | 1            |             |              |
| 763-102   | HIGH VISIBILITY ORANGE SEAT BELTS                                                                                |              |             |              |
| 532-002   | ADJUSTABLE TILT AND TELESCOPING STEERING COLUMN                                                                  |              |             |              |
| 540-044   | 4-SPOKE 18 INCH (450MM) BLACK STEERING WHEEL WITH SWITCHES                                                       |              |             |              |
| 765-002   | DRIVER AND PASSENGER INTERIOR SUN VISORS                                                                         |              |             |              |

### Instruments & Controls

|           |                                                                                              |  |   |     |
|-----------|----------------------------------------------------------------------------------------------|--|---|-----|
| * 4CH-004 | 4 EXTRA PROGRAMMABLE SWITCHES/INDICATORS                                                     |  |   |     |
|           | \$C3N0047ZZ,C2A0015ZZ,C1A0012ZZ,C2B0048ZZ                                                    |  |   |     |
| 106-002   | ELECTRONIC ACCELERATOR CONTROL                                                               |  |   | STD |
| 732-998   | NO INSTRUMENT PANEL-DRIVER                                                                   |  |   | STD |
| 734-022   | FULLY CONFIGURABLE CENTER INSTRUMENT PANELS                                                  |  |   | STD |
| 870-001   | BLACK GAUGE BEZELS                                                                           |  |   | N/C |
| 486-001   | LOW AIR PRESSURE INDICATOR LIGHT AND AUDIBLE ALARM                                           |  |   | STD |
| 840-001   | DUAL NEEDLE PRIMARY AND SECONDARY AIR PRESSURE GAUGE                                         |  |   | STD |
| 198-003   | DASH MOUNTED AIR RESTRICTION INDICATOR WITH GRADUATIONS                                      |  |   |     |
| 721-003   | 87 DECIBELS TO 112 DECIBELS AUTOMATIC SELF-ADJUSTING BACKUP ALARM                            |  | 3 |     |
| 149-015   | ELECTRONIC CRUISE CONTROL WITH CONTROLS ON STEERING WHEEL SPOKES                             |  |   | STD |
| 156-007   | KEY OPERATED IGNITION SWITCH AND INTEGRAL START POSITION; 4 POSITION OFF/RUN/START/ACCESSORY |  |   | STD |

|   | Data Code | Description                                                                                   | Weight<br>Front | Weight<br>Rear | Retail Price |
|---|-----------|-----------------------------------------------------------------------------------------------|-----------------|----------------|--------------|
|   | 811-044   | PREMIUM INSTRUMENT CLUSTER WITH 5.0 INCH TFT COLOR DISPLAY                                    |                 |                | STD          |
|   | 81B-003   | DIGITAL PANEL LAMP DIMMER SWITCH IN DRIVER DISPLAY                                            |                 |                | STD          |
|   | 160-038   | HEAVY DUTY ONBOARD DIAGNOSTICS INTERFACE CONNECTOR LOCATED BELOW LH DASH                      |                 |                | STD          |
|   | 844-001   | 2 INCH ELECTRIC FUEL GAUGE                                                                    |                 |                | STD          |
|   | 845-011   | FUEL FILTER RESTRICTION INDICATOR                                                             |                 |                | STD          |
|   | 148-073   | ENGINE REMOTE INTERFACE FOR REMOTE THROTTLE                                                   |                 |                |              |
|   | 48H-012   | POWERTRAIN INTERFACE CONNECTOR LOCATED BETWEEN SEATS WITHOUT CAPS                             |                 |                |              |
|   | 48C-003   | QUICKFIT PROGRAMMABLE INTERFACE CONNECTOR(S) UNDER CAB WITH CAP                               |                 |                |              |
|   | 163-014   | ENGINE REMOTE INTERFACE CONNECTOR AT POWERTRAIN INTERFACE CONNECTOR                           |                 |                |              |
| N | 33U-012   | TMC RP170 INTERFACE CONNECTOR                                                                 |                 |                |              |
|   | 856-001   | ELECTRICAL ENGINE COOLANT TEMPERATURE GAUGE                                                   |                 |                | STD          |
|   | 854-008   | DIGITAL ENGINE OIL TEMPERATURE IN DRIVER DISPLAY                                              |                 |                | STD          |
|   | 852-002   | ELECTRIC ENGINE OIL PRESSURE GAUGE                                                            |                 |                | STD          |
|   | 864-001   | 2 INCH TRANSMISSION OIL TEMPERATURE GAUGE                                                     |                 |                |              |
|   | 867-004   | ELECTRONIC OUTSIDE TEMPERATURE SENSOR DISPLAY IN DRIVER MESSAGE CENTER                        |                 |                | STD          |
|   | 830-006   | ENGINE AND TRIP HOUR METERS INTEGRAL WITHIN DRIVER DISPLAY AND HOBBS PTO OPERATION HOUR METER | 2               |                |              |
|   | 73H-014   | (1) BACKUP CAMERA-END OF FRAME MOUNTED WITH 15 FOOT EXTRA LONG CABLE COILED AT END OF FRAME   |                 |                | STD          |
|   | 736-998   | NO OBSTACLE DETECTION SYSTEM                                                                  |                 |                |              |
|   | A87-998   | NOT APPLICABLE - UNIT NOT SPEC'D WITH DETROIT ASSURANCE                                       |                 |                |              |
|   | 72N-998   | NO OBJECT DETECTION SYSTEM RELOCATION PREP                                                    |                 |                | STD          |
|   | 72J-998   | NO DR ASSIST SYSTEM                                                                           |                 |                | N/C          |
|   | 49B-998   | NO VEHICLE STABILITY ADVISOR OR CONTROL                                                       |                 |                |              |
|   | 73B-998   | NO LANE DEPARTURE WARNING SYSTEM                                                              |                 |                |              |
|   | 679-998   | NO OVERHEAD INSTRUMENT PANEL                                                                  |                 |                |              |
|   | 35M-010   | 1 QUICKFIT PROGRAMABLE MODULE (QPM/XMC)                                                       | 10              |                |              |

| Data Code | Description                                                                                                                     | Weight<br>Front | Weight<br>Rear | Retail Price |
|-----------|---------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------|--------------|
| 1U1-002   | TOP OF DASH RAM MOUNT WITHOUT POWER OR GROUND, FOR CUSTOMER FURNISHED DEVICE                                                    |                 |                |              |
| 746-143   | 7" B-PANEL INTERACTIVE TOUCHSCREEN DISPLAY RADIO W/ USB-C, APPLE CARPLAY, ANDROID AUTO, BLUETOOTH/AM/FM/SXM/WB, WITH MICROPHONE |                 |                | STD          |
| 747-001   | DASH MOUNTED RADIO                                                                                                              |                 |                | STD          |
| 750-002   | (2) RADIO SPEAKERS IN CAB                                                                                                       |                 |                | STD          |
| 753-998   | NO AM/FM RADIO ANTENNA                                                                                                          |                 |                | STD          |
| 749-998   | NO CB RADIO MOUNTING PROVISION                                                                                                  |                 |                | STD          |
| 75W-006   | SHARKFIN MULTI-BAND ANTENNA, CENTRAL ROOF MOUNTING LOCATION:<br>AM/FM/WEATHERBAND, WIFI/BLUETOOTH, SDAR/SIRIUSXM, GNSS/GPS      |                 |                |              |
| 78C-003   | INTEROPERABLE SDAR ANTENNA                                                                                                      |                 |                | STD          |
| 74D-006   | STANDARD RADIO WIRING WITH STEERING WHEEL CONTROLS                                                                              |                 |                | STD          |
| 810-027   | ELECTRONIC MPH SPEEDOMETER WITH SECONDARY KPH SCALE, WITHOUT ODOMETER                                                           |                 |                | STD          |
| 817-001   | STANDARD VEHICLE SPEED SENSOR                                                                                                   |                 |                | STD          |
| 812-001   | ELECTRONIC 3000 RPM TACHOMETER                                                                                                  |                 |                | STD          |
| 813-1C8   | DETROIT CONNECT PLATFORM HARDWARE                                                                                               |                 |                | STD          |
| 6TS-008   | (2) TMC RP1226 ACCESSORY CONNECTORS: (1) LOCATED BEHIND PASSENGER SIDE REMOVABLE DASH PANEL (1) CENTER OF OVERHEAD CONSOLE      |                 |                |              |
| 162-002   | IGNITION SWITCH CONTROLLED ENGINE STOP                                                                                          |                 |                | STD          |
| 264-030   | (1) OVERHEAD MOUNTED LANYARD CONTROL FOR DRIVER AIR HORN                                                                        |                 |                | STD          |
| 883-998   | NO TRAILER HAND CONTROL BRAKE VALVE                                                                                             |                 |                | STD          |
| 836-015   | DIGITAL VOLTAGE DISPLAY INTEGRAL WITH DRIVER DISPLAY                                                                            |                 |                | STD          |
| 660-025   | SINGLE ELECTRIC WINDSHIELD WIPER MOTOR WITH DELAY WHEN PARK BRAKE SET, TRANSITION TO SLOWEST SPEED                              |                 |                | N/C          |
| 304-030   | ROTARY HEADLAMP SWITCH, MARKER LIGHTS/HEADLIGHTS SWITCH WITH PULL OUT FOR OPTIONAL FOG/ROAD LAMPS                               |                 |                |              |
| 882-009   | ONE VALVE PARKING BRAKE SYSTEM WITH WARNING INDICATOR                                                                           |                 |                | STD          |
| 299-020   | SELF CANCELING TURN SIGNAL SWITCH WITH DIMMER, HEADLAMP FLASH, WASH/WIPE/INTERMITTENT                                           |                 |                | STD          |

| Data Code | Description                                                                                       | Weight<br>Front | Weight<br>Rear | Retail Price |
|-----------|---------------------------------------------------------------------------------------------------|-----------------|----------------|--------------|
| 298-046   | INTEGRAL ELECTRONIC TURN SIGNAL<br>FLASHER WITH 40 AMP (20 AMP PER SIDE)<br>TRAILER LAMP CAPACITY |                 |                | STD          |

#### Design

|         |                        |  |  |     |
|---------|------------------------|--|--|-----|
| 065-000 | PAINT: ONE SOLID COLOR |  |  | STD |
|---------|------------------------|--|--|-----|

#### Color

|         |                                                    |  |  |     |
|---------|----------------------------------------------------|--|--|-----|
| 980-5F6 | CAB COLOR A: L0006EY WHITE ELITE EY                |  |  | STD |
| 986-020 | BLACK, HIGH SOLIDS POLYURETHANE CHASSIS<br>PAINT   |  |  | STD |
| 964-6Z7 | BUMPER PAINT: FP24812 ARGENT SILVER<br>DUPONT FLEX |  |  | N/C |
| 963-003 | STANDARD E COAT/UNDERCOATING                       |  |  | STD |

#### Certification / Compliance

|         |                                                                |  |  |     |
|---------|----------------------------------------------------------------|--|--|-----|
| 996-001 | U.S. FMVSS CERTIFICATION, EXCEPT SALES<br>CABS AND GLIDER KITS |  |  | STD |
|---------|----------------------------------------------------------------|--|--|-----|

#### Sales Programs

|         |               |  |  |     |
|---------|---------------|--|--|-----|
| RAB-998 | NO ADJUSTMENT |  |  | STD |
|---------|---------------|--|--|-----|

### TOTAL VEHICLE SUMMARY

#### Adjusted List Price

#### Weight Summary

|                             | Weight<br>Front | Weight<br>Rear | Total<br>Weight |
|-----------------------------|-----------------|----------------|-----------------|
| Factory Weight <sup>+</sup> | 11088 lbs       | 8454 lbs       | 19542 lbs       |
| Total Weight <sup>+</sup>   | 11088 lbs       | 8454 lbs       | 19542 lbs       |

### ITEMS NOT INCLUDED IN ADJUSTED LIST PRICE

#### Other Factory Charges

|         |                                                             |
|---------|-------------------------------------------------------------|
| RD1-215 | 5 YR DETROIT CONNECT CORE PACKAGE -DETROIT CONNECT PLATFORM |
| RD3-998 | NO SAFETY EVENT VIEWER                                      |
| RT1-998 | NO FACTORY PREP DATA SERVICES SELECTED                      |
| PAT-025 | TARIFF IMPACT FEE M2 106/112, 108/114 SD                    |
| RAK-048 | DETROIT EPA27 ESCALATOR                                     |
| R28-001 | MY28 ESCALATOR                                              |
| P73-2FT | STANDARD DESTINATION CHARGE                                 |

(+) Weights shown are estimates only.

If weight is critical, contact Customer Application Engineering.

(\*\*) Prices shown do not include taxes, fees, etc... "Net Equipment Selling Price" is located on the Quotation Details Proposal Report.

(\*\*\*) All cost increases for major components (Engines, Transmissions, Axles, Front and Rear Tires) and government mandated requirements, tariffs, and raw material surcharges will be passed through and added to factory invoices.

## Q U O T A T I O N

### 114SD PLUS CONVENTIONAL CHASSIS

SET BACK AXLE - TRUCK  
DETROIT DD13 GEN 6 12.8L 525 HP @ 1625 RPM, 1900  
GOV RPM, 1850 LB-FT @ 900 RPM  
ALLISON 4500 RDS AUTOMATIC TRANSMISSION WITH  
PTO PROVISION  
MERITOR RT-46-160 46,000# R-SERIES TANDEM REAR  
AXLE  
HENDRICKSON HAULMAAX EX 46,000# REAR  
SUSPENSION  
MERITOR MFS-20-133A 20,000# FL1 71.0 INCH KPI/3.74  
INCH DROP SINGLE FRONT AXLE  
20,000# TAPERLEAF FRONT SUSPENSION

114 INCH BBC FLAT ROOF ALUMINUM CONVENTIONAL  
CAB  
6675MM (263 INCH) WHEELBASE  
NO FIFTH WHEEL  
1/2X3.64X11-7/8 INCH STEEL FRAME  
(12.7MMX301.6MM/0.5X11.88 INCH) 120KSI  
1900MM (75 INCH) REAR FRAME OVERHANG  
1/4 INCH (6.35MM) C-CHANNEL INNER FRAME  
REINFORCEMENT  
HENDRICKSON EX13 COMP 13,500# FF1 STEERABLE  
INTEGRAL PUSHER AXLE

|                          |                      | PER UNIT | TOTAL |
|--------------------------|----------------------|----------|-------|
| VEHICLE PRICE            | TOTAL # OF UNITS (1) | \$       |       |
| EXTENDED WARRANTY        |                      | \$ 0     | \$ 0  |
| DEALER INSTALLED OPTIONS |                      | \$ 0     | \$ 0  |
|                          |                      | \$       |       |

### TAXES AND FEES

|                |      |      |
|----------------|------|------|
| TAXES AND FEES | \$ 0 | \$ 0 |
| OTHER CHARGES  | \$ 0 | \$ 0 |

### TRADE-IN

|                    |        |        |
|--------------------|--------|--------|
| TRADE-IN ALLOWANCE | \$ (0) | \$ (0) |
|--------------------|--------|--------|

**BALANCE DUE** (LOCAL CURRENCY) \$

### COMMENTS:

Projected delivery on \_\_\_ / \_\_\_ / \_\_\_ provided the order is received before \_\_\_ / \_\_\_ / \_\_\_.

### APPROVAL:

Please indicate your acceptance of this quotation by signing below:

Customer: X\_\_\_\_\_ Date: \_\_\_ / \_\_\_ / \_\_\_.

**Daimler Truck Financial**

Financing that works for you.

See your local dealer for a competitive quote from Daimler Truck Financial, or contact us at [Information@dtfoffers.com](mailto:Information@dtfoffers.com).

Daimler Truck Financial offers a variety of finance, lease and insurance solutions to fit your business needs. For more information about our products and services, visit our website at [www.daimler-truckfinancial.com](http://www.daimler-truckfinancial.com).



